SUPER SATURN SUBMERSIBLE

S3 | SATURN SERIES



CATEGORY

Specialty LED Light | LED Water Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than 80,000 hours (20+ years at 8 hours a day) 20 Year Warranty

We run our fixtures 40% cooler than LM-80 testing standards









SS

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Water Suitable Up Light Down Light	6061 Aluminum C360 Solid Brass 316 Stainless Steel	Internal Driver	10.5-18 VAC	See features section for installation details	SJEOOW 18 AWG Tinned Copper Wire 20 Foot Length	80	UL1838 Low Voltage Landscape Lighting IP68

PRODUCT DIMENSIONS

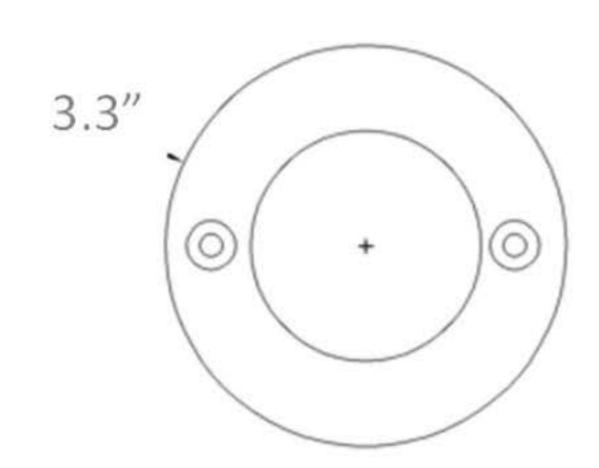

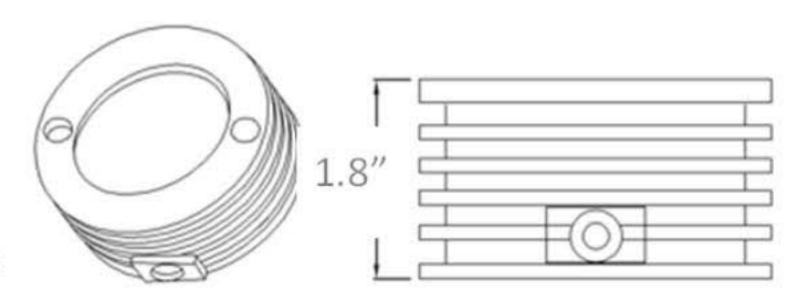

PHOTOMETRICS

*Complete IES files furnished upon request

BE - WATTS / VA / LUMENS

BE - WATTS / VA / LUMENS

20 - 2W/4VA -110lm

35 - 4W/7VA - 190lm

50 - 6W/10VA - 330Im

75 - 9W/15VA - 630Im

FEATURES

- Compression lens technology; no glue
- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver
- STAINLESS STEEL MODEL ONLY is suitable for installation in: fresh water, salt water, chlorinated water, fish ponds, fish tanks
- **BLACK MODEL ONLY** is suitable for installation in: fresh water, NO chlorine/ harsh chemicals or salt water
- BRASS MODEL ONLY is suitable for installation in: fresh water, salt water, chlorinated water, **NOT** suitable for fish ponds or tanks

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
12° 25° 40° 60°	Black (BLK) C360 Solid Brass (BR) Stainless Steel (SS)

POWER CONSUMPTION

COLOR TEMPERATURE	VA	VA	VA	VA				
3000K	4	7	10	15				
2700K	4	7	10	15				
5000K	4	7	10	15				
AMB*	6	10	11	17				
BLU	6	11	11	17				
RBL	6	7	11	17				
GRN	6	11	11	17				
RED*	4	8	8	13				
FSA**	N/A	N/A	9	15				
LVR**	N/A	N/A	10	16				
INDICATES STOCK	INDICATES STOCKED ITEMS							

ADDITIONAL INFO

- For custom light output, contact your sales associate
- **Fuchsia and Lavender require additional lead time
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information









